

Sensors

FESTO

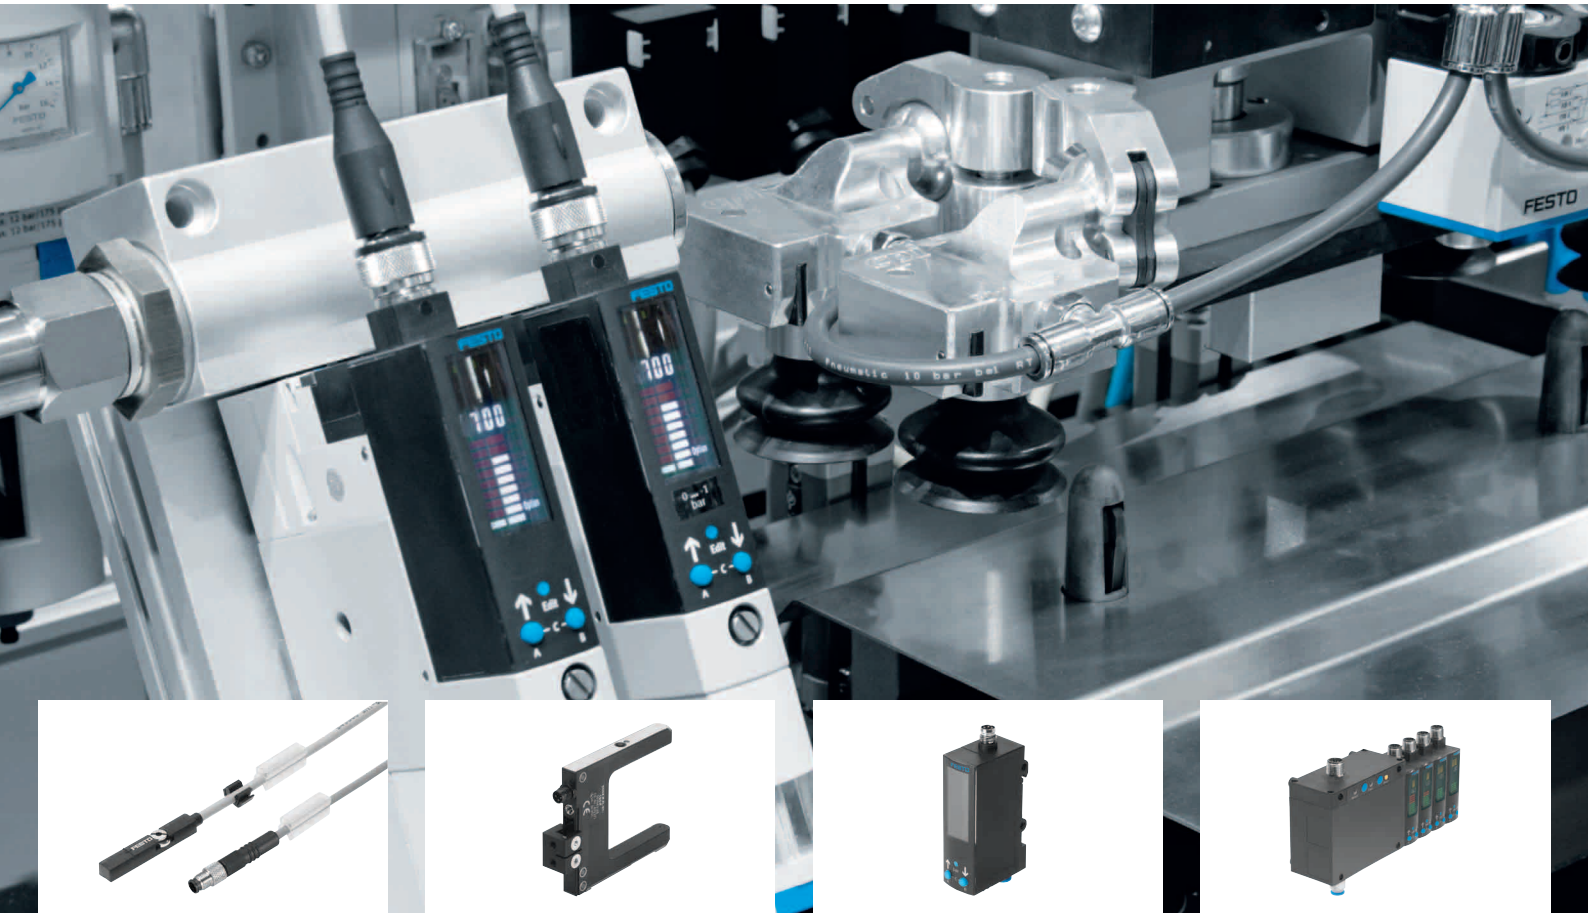


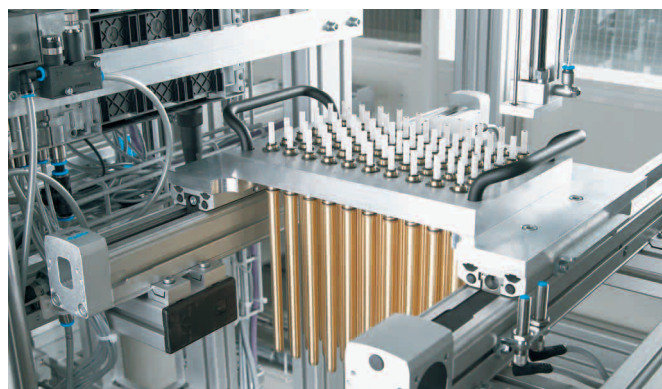


Table of contents

	Page
Proximity sensors	4
Position transmitters	6
Pressure and vacuum sensors	8
Flow sensors	10
Inductive proximity switches and sensors	12
Optical sensors	14
Compact vision systems	16
Connection technology	17
Industry-specific sensors	18

Advantages at a glance

- Complete range from the specialists in pneumatics-related sensor technology
- System competence from a single source
- Industry solutions
- Maximised process reliability
- Reduced downtimes
- System management for reduced costs





Sensor technology – the modular system for successful automation from a single source

Faster cycle times, better process control, maximised process reliability and reduced downtimes. Nowadays the optimal use of resources by system and machine management is a critical factor for the economic success of any company.

This is also the case for sensor technology, which plays an important part in the world of automation. Festo realised this more than 40 years ago and has consistently expanded its sensor range to further enhance both efficiency and profitability in automation.

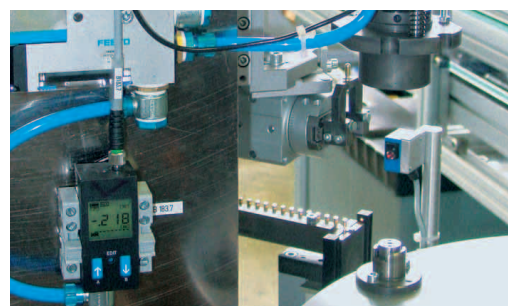
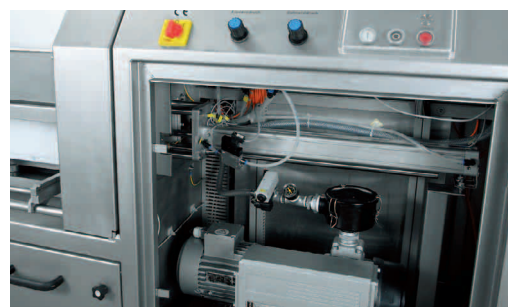
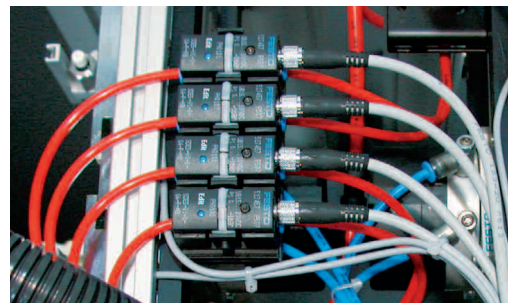
The current sensor range offers the right sensor for every task, be it pinpoint diagnostics, preventive condition monitoring or industry-specific tasks, for example in process automation or the automotive industry. With this range, Festo ensures perfect solutions for the entire automation chain – thanks to system competence from a single source.

Products and services – long-term success assured

The know-how of successful customers, the automation competence of a strong partner with an in-depth understanding of production and process sequences and a meaningful integration of value added chains: this is a combination that yields success.

In focus – with sensors from Festo


Highest process safety, optimal performance and maximum reliability: the new and comprehensive portfolio of sensors combines these essential core factors, thus ensuring smooth and efficient production sequences. Many sensors represent the ultimate in technologically feasible and practical solutions and are surprisingly cost-effective. The portfolio ranges from position transmitter SMAT through precise and reliable contact monitoring with SOPA up to high-speed cameras for diagnostics and function monitoring, thus offering sensor technology for all applications.






Proximity sensors

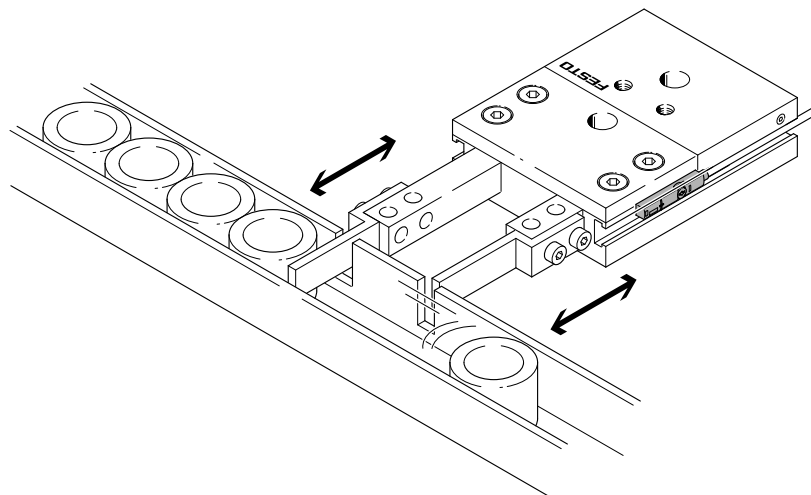Proximity sensors for pneumatic drives form the starting point for Festo's sensor range – with good cause. These sensors are optimally matched and form a stable and successful platform for new variants and completely new functionalities.



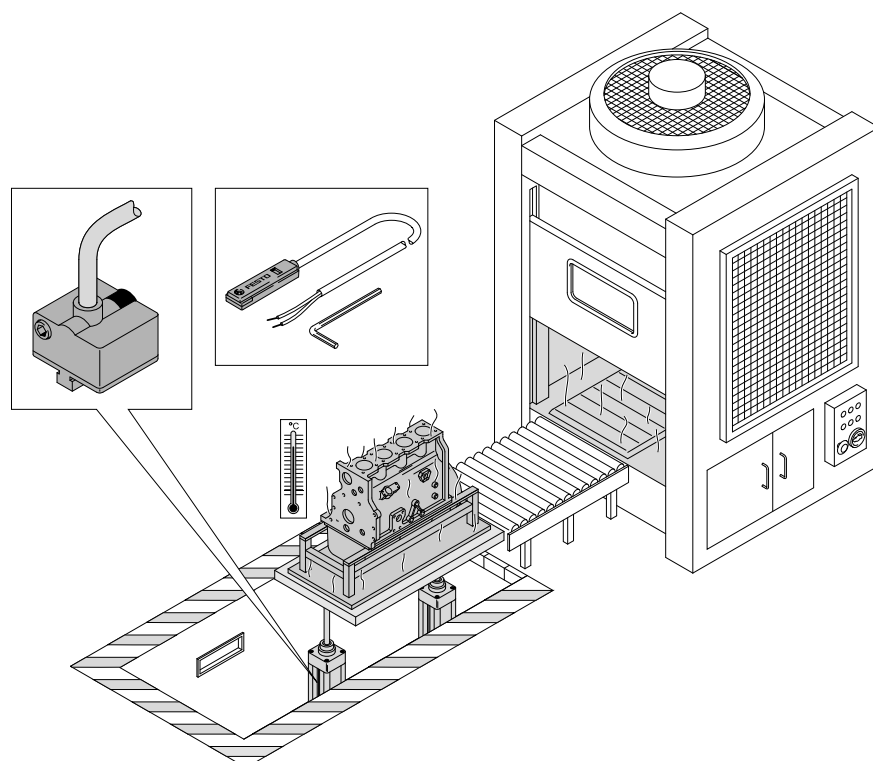Proximity sensor: Binary position sensing on the drive



Proximity sensor for very high temperatures



Fits all cylinders with T-slot:
Proximity sensor SMT-/SME-8M
 One for all: universally and mechanically harmonised sensor for all Festo drive units. Its secure fitting in the slot makes it

very efficient. Vibration, shock and tensile forces applied to the cable will neither cause the sensor to become loose nor lead to unreliable sensor functioning.

- Contactless or contacting sensing
- Operating voltage up to 250 V AC/DC
- Plug M5, M8, M12, or open end



Proximity sensor SMT-/SME-10M
 Reliable sensing solution for drive technology with C-slot.

- Switching outputs: PNP, NPN, contacting
- Switching element function: N/O contact

- Electrical connection: M8, M12, open end
- Operating voltage up to 30 V AC/DC



For mini and precision grippers:
Proximity sensors SMH
 Proximity sensors SMH are position sensors which have been specially developed for use with Festo mini and precision grip-

pers. Depending on the grip arm position, an analogue electrical signal is produced in the proximity sensor. The conversion into 3 digital output signals = 3 grip-per jaw positions takes place via

evaluation units SVE4 or SMH-AE which are to be attached.

Proximity sensors for all requirements

No matter what the environment or the task demands, proximity sensors from Festo come in a huge range of variants and are ready for practically everything. Our range even has the right accessories for mounting.

Here are some examples:

- ATEX-certified
- For 230 V AC/DC requirement
- With normally closed/normally open function, e.g. for the food industry
- Resistant to acids and bases
- Resistant to cooling lubricants
- Welding field immune
- For very high temperatures
- For very low temperatures
- Short construction for grippers

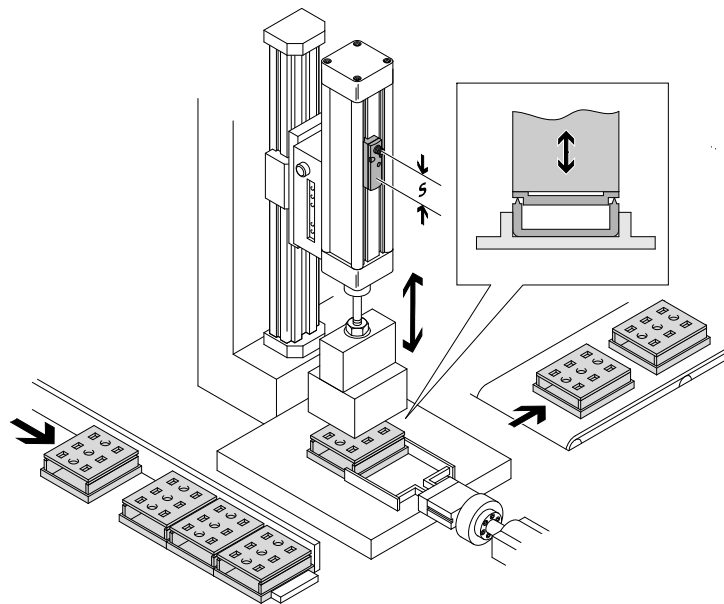
Have you not found what you are looking for? Just ask us!





Position transmitters

Analogue position transmitters are a logical, continuous development of the binary proximity sensor. They enable a multitude of new application areas when combined with pneumatic cylinders:

- Quality control
- Ultrasonic welding
- Process control during sheet manufacture or during wear monitoring
- Object sensing during pressing or clamping
- Object sensing when recording positions, when products are changed or when quality-sorting parts



Ultrasonic welding

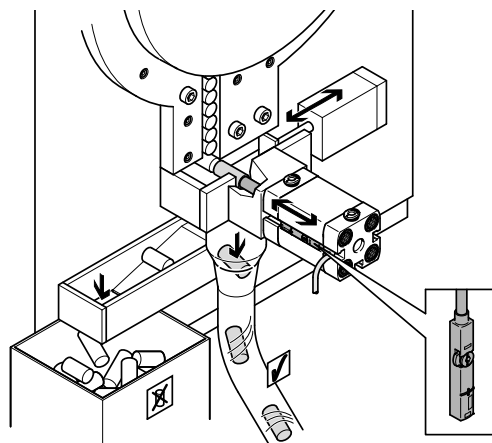

Quality control



Fits all profile slot cylinders:

Position transmitter SMAT

It opens up new areas of application for pneumatic cylinders. The position of a cylinder piston is indicated within a range of 50 mm via an analogue,

displacement-proportional output signal. The integrated OOR (out-of-range) detector shows when the piston is outside the sensing range.

- Sensing range: 50 mm
- Analogue output: 0 - 10 V, 0 - 20 mA
- Reproducibility: ± 0.064 mm



Position transmitter SMAT-8M

As a position transmitter that is the size of a proximity sensor, it is designed for all applications where space is restricted. Its compact construction opens

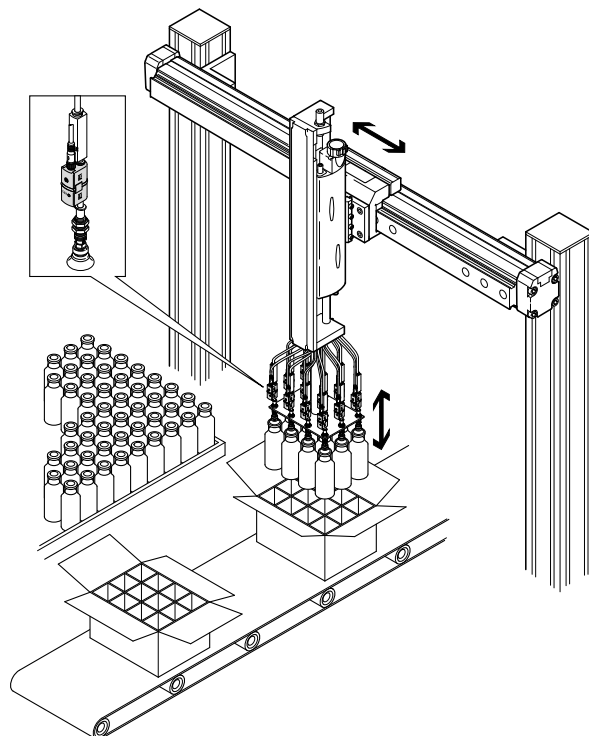
up new areas of application, particularly in terms of compact cylinders and grippers. The position feedback of the piston is produced as an analogue voltage signal.

- Sensing range: Up to 40 mm
- Analogue output: 0 - 10 V
- Reproducibility: ± 0.1 mm, on grippers ± 0.025 mm




Pressure and vacuum sensors

Efficient and reliable pressure and vacuum monitoring and control, as well as flow monitoring, are indispensable in automation using pneumatics. These extend the range of system applications, ensure greater reliability and offer the option of remote monitoring and maintenance. They are also easy and quick to use thanks to the standardised control and display concept shared by all Festo pressure sensors.



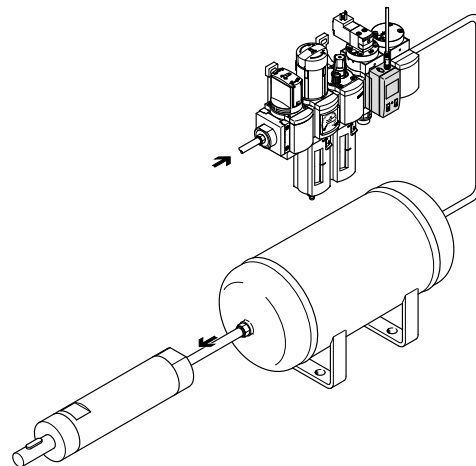Presence control using pressure and vacuum sensor SDE5



Integrated in a service unit, the pressure sensor SDE1 monitors the pressure range of a pulsed air motor



Price-optimised: Pressure and vacuum switch SDE5

The SDE5 is a cost-effective alternative for simple and quick monitoring. Intelligent, easy to install and reliable, it lends itself to use with compressed air,

closed-loop control and vacuum detection as well as object detection via back pressure.

- Selectable output functions
- Patented quality sorting
- Minimum assembly times thanks to QS fittings and M8

- plug connectors or free cable end
- Rapid switching-point adjustment by pressing a button
- Measuring ranges: 0 ... -1, -1 ... 1, 0 ... 2, 0 ... 6, 0 ... 10 bar
- Analogue output: 0 - 10 V



Compact and economical: pressure and vacuum sensor SPAB

Cost-effectiveness and high functionality join forces in the pressure and vacuum sensors SPAB. Although the unit is very

compact, all values can be easily read from a multi-coloured, two-part display.

- Pressure supply ports with GPT, NPT, RPT threads
- Electrical connection M8 or cable

- Measuring ranges: -1 ... 1, 0 ... 10 bar
- Analogue and digital outputs
- Pressure units freely selectable
- Optional: adapter plate for connection in very small installation spaces



Highly functional: Pressure and vacuum sensor SDE1

With the SDE1 modular system for pressure measurement, pressure monitoring and sensing, all pressure values are permanently controlled. Thanks to clear 3-key prompting and LCD

display, it can be quickly commissioned without the need for operating instructions.

- Front panel, H-rail or mounting for service units D and MS series
- Plug connector M8 or M12
- Freely programmable

- hysteresis/comparator mode; freely selectable for relative or differential pressure
- Quick mounting via simple insertion or click-in function
- Protection class IP65



Space-optimised: Pressure and vacuum sensor SDE3

Designed for relative and differential pressure sensing by using two independent pressure sensors and LCD display in one unit.

- Space-saving and TPM compatible
- Intuitive operation and quick Teach-In option
- Alphanumerical pressure display for dynamic processes via bar chart

- Very quick and easy H-rail and front panel mounting
- Coded lock prevents manipulation and permits reading of the settings



All fluids: Pressure sensor SDET

The SDET is a universal pressure sensor that is highly flexible in its applicability with gas, fluids and air.

- Large pressure measuring range between -1 ... 1 bar to 0 ... 100 bar, depending on the version selected.
- Fast installation thanks to standardised G1/4 air

- connection, 4-pin M12 plug and standardised 0.1 ... 10 V or 4 ... 20 mA analogue output

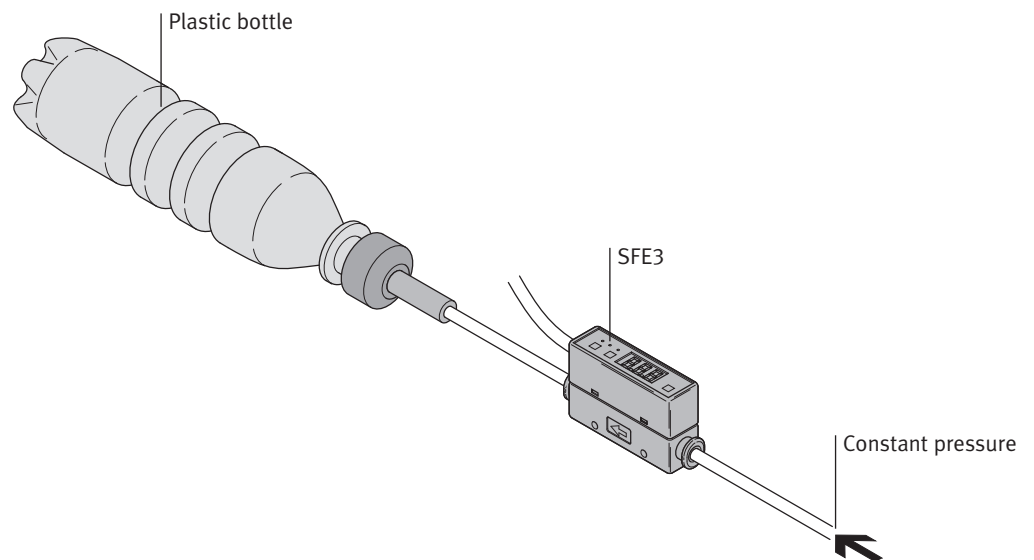


Flow sensors


Simple diagnostics and condition monitoring processes can be achieved by monitoring flow rates. Changing flow values are often an indication of problems ahead.

Areas of application

- Detection of very small parts
- Placement monitoring of components with delicate surfaces
- Placement detection
- Function monitoring
- Leak testing
- Presence control
- Monitoring of energy costs



Quality control with the flow sensor

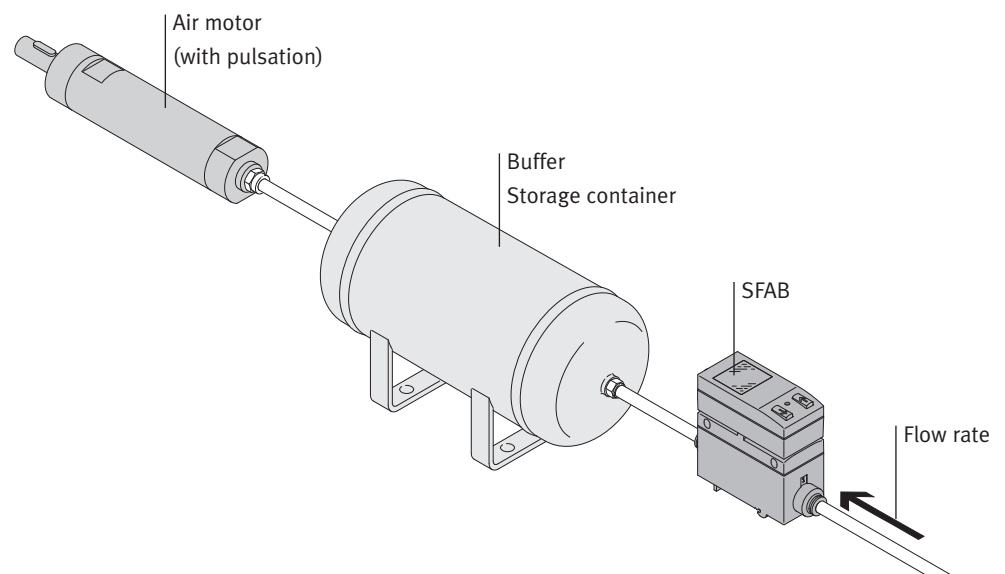

Function monitoring of an air motor using flow sensors



**Incredibly compact:
Flow sensors and transmitters
SFE3/SFET**

Ideally suited for applications in the electronics, light assembly,

optical or pharmaceutical industries: the series SFE3 flow sensors.

- SFE3: Unidirectional flow sensor with display, measuring

- range of 0.05 ... 50 l/min
- SFET: Flow transmitter, optional display, measuring range of 0.005 ... 10 l/min
- Protection class IP40




**Impressive, simple, reliable:
Flow sensors SFAB**

The new flow sensors with an attractive display and control concept offer leakage detection, leak tightness of end products and flow monitoring.

- Unidirectional flow sensor with display
- 360° rotatable display
- H-rail or wall mounting
- Switching between the 3 standard conditions (DIN 1343, ISO 2533, ISO 6358)

- Measuring ranges: 10, 50, 200, 600, 1000 l/min



**High flow rates, yet compact:
Flow sensors SFAM**

The SFAM can be used as a stand-alone device or in combination with MS series service units. A large, illuminated display supplies absolute flow data,

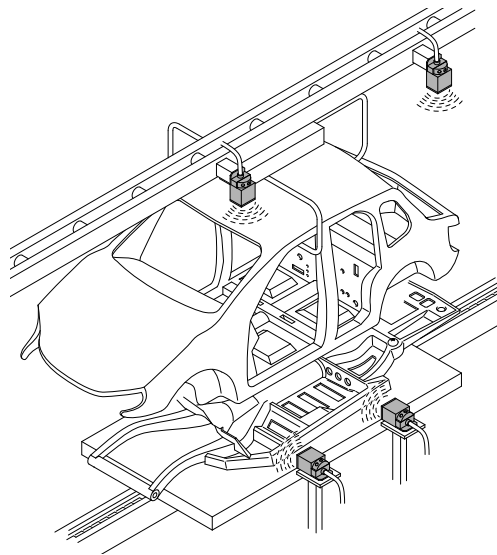
- consumption data, threshold values and convenient switching-point adjustment.
- Switching between the 3 standard conditions (DIN 1343, ISO 2533, ISO 6358)
- Flexible installation thanks to compact design

- Unidirectional flow sensor with display: from left or right – selectable
- Flow ranges: 1000, 3000, 5000, 10000, 15000 NI/min




Inductive proximity switches and sensors

The SIE series sensors can detect all metals, with functions ranging from sensing to distance measurement of metallic objects.



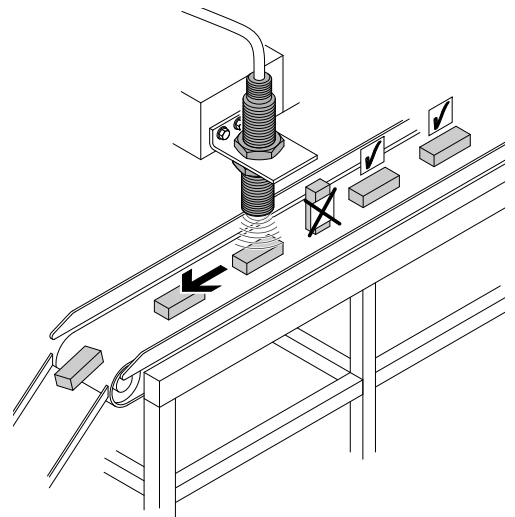Sensing over large distances: Inductive proximity sensor SIEF-Q40



Position detection with the analogue inductive sensor SIEA



Standardised: Standard inductive proximity sensors SIE..

Standardised, low cost, reliable, simple – suitable for a wide range of applications.

- Diameter of 3 mm to M30
- With plug or cable
- Normally closed or normally open contact
- Flush or non-flush fitting
- High protection class: IP67

- D.C. voltage designs in 3-wire connection PNP and NPN
- LED for switching status display
- Standard-compliant external construction facilitates simple replacement of existing solutions



Made of polyamide: Inductive proximity sensor SIEN/SIED...-PA

The ultimate low-cost solution for detecting metallic objects.

- Approved for the food and packaging industry, also used in the chemical industry
- Sturdy thanks to the high protection class IP65/IP67

- Standard sizes: M12, M18, M30
- Economical thanks to attractive price/performance ratio



250 % faster: Inductive proximity sensor SIEF Factor 1

The perfect combination of new features – the easiest and most reliable sensor ever.

- Factor 1, identical switching distances for a wide range of different metals
- Considerably greater switching distance compared to standard sensors

- 250 % faster than conventional proximity sensors
- Insensitive to external DC and AC magnetic fields



Square: Sensors SIES (special design)

Square designs in different sizes have been added to the cylindrical designs.

- Thanks to their design, these versions can be mounted directly and are thus extremely space-saving



With analogue output: Inductive sensor SIEA

Simple, economical and precise, ideal for measuring, monitoring and checking functions at 20 mm distance. These SIEA sen-

sors are equipped with an analogue signal which is proportional to distance and offers a voltage and current output.

- Standard sizes: M8, M12, M18, M30

- High resolution and excellent repetition accuracy
- Large sensing range of up to 20 mm (M30)
- Virtually all sizes offer two standard analogue outputs of 4 ... 20 mA and 0 ... 10 V



With stainless steel housing: Inductive sensor SIEH- ... -CR

Sturdy thanks to the all-round enclosed design of the stainless steel housing, including the

active surface.

- Solid metal housing V2A-1.4305-AISI303
- For demanding mechanical requirements

- Resists pressure
- Large sensing distances (also for other metals)
- M12, M18, (NO, PNP, NPN, with plug or cable)



Innovative: Inductive proximity sensor SIES-8M

Ideal for sensing intermediate and end positions of electric drives. The only inductive sensor for 8 mm slots with patented status display via two LEDs.


- Tried and tested mounting technology similar to proximity sensors
- Quick positioning and simple mounting using clamping technology
- Perfect visibility, regardless of the direction of approach of the object being sensed

- Repetition accuracy $\leq \pm 0.05$ mm (radial)
- Power supply: 10 to 30 V
- Switching distance: 1.5 mm
- Per EN 60947
- Flush mounting
- Operating temperature: -25 to +70 °C




Optical sensors

Thanks to the optical measuring method, SOE series sensors cover a wide range of functions, from detecting colour and miniature components through to laser distance sensing.



Diffuse sensor with background illumination: Sensing of objects irrespective of the surface and colour



Presence detection in automation technology



Standard-compliant design: Optoelectronic sensors SOEG-...-M12/M18/M18W
Standard-compliant design for simple exchange. Numerous

variants such as diffuse sensors, sensors with background suppression, retro-reflective and through-beam sensors, etc.

- Diameters: M12, M18 and M18W (with lateral light emission)
- With plug or cable
- With PNP or NPN output



Miniaturised: Optoelectronic sensors SOE-...-Q20
The new optoelectronic sensor range Q20 with practical Teach-In function. Ideal for restricted installation spaces, offering maximum precision, dynamic

process adaptation and maximum ease of use.

- Size 20 x 32 x 12 mm
- High protection class IP67
- Switching frequency of up to 4,000 Hz
- Reliable adjustment via visible

- red light and laser
- Teach-In via keys, remote control via electrical connection. Integrated protection against manipulation.
- Dynamic Teach-In



Compact design: opto-electronic sensors SOE-...-Q30
Q30 sensors provide maximum performance in a miniature housing. They are compact, extremely sturdy and offer all protective functions. The complete range consists of sensors, very precise

background suppression sensors, retro-reflective sensors, through-beam sensors and fibre-optic units

- Size 30 x 30 x 15 mm
- Resistant to shock and vibration thanks to one-piece moulding

- Precise background suppression
- High operating reserve
- Adjustment via potentiometer



Outstanding: Optical sensors SOE..-Q50

All sensors of the SOE..-Q50 series offer outstanding features such as scaling potentiometers secured against overtravel, numerical scaling, as well as

superior display elements and a switching frequency of up to 2,500 Hz.

- Maximum accuracy
- Red light and laser
- Dimensions of just 50 x 50 x 17 mm

- Plug rotatable by 270° for M12 size, in steps of 45°
- Degree of protection IP67
- LEDs for operating status and operating voltage display



Compact: Colour sensor SOEC-RT-Q50

The world's smallest colour sensor. Using just one white light source, and with a standard housing, the SOEC-RT-Q50 can detect objects anywhere within

its operating range. Featuring 5 definable limit values, the sensor can be optimally tuned to the colour of the test object.

- The sensor can quickly and easily learn to recognise new colours of an object via its

- Teach-In function.
- 3 independent channels with Teach-In capability
- Switching frequency 500 Hz
- Dimensions of just 50 x 50 x 17 mm



Small and precise: Fibre-optic cables and fibre-optic units SOE4

These provide precise and space-saving position detection on very complex and compact machines, particularly in the electronics and light assembly industries. For detecting small

workpieces (any material) at great distances or high temperatures.

- Highly flexible applications thanks to a choice of three fibre-optic units: without display, with display, or with display and analogue output
- Fast and reliable set-up using simple Teach-In method

- Flexible switchover between four operating modes: standard, fine, fast, long distance
- Up to four fibre-optic units mounted next to one another work in synchrony to avoid mutual interference



Reliable and efficient: Light barrier sensors SOOF-P and SOOF-M

Easy to install and adjust because emitter and receiver are in a single housing. Traditional metal version or innovative poly-

mer variant with a status display which is visible from all sides.

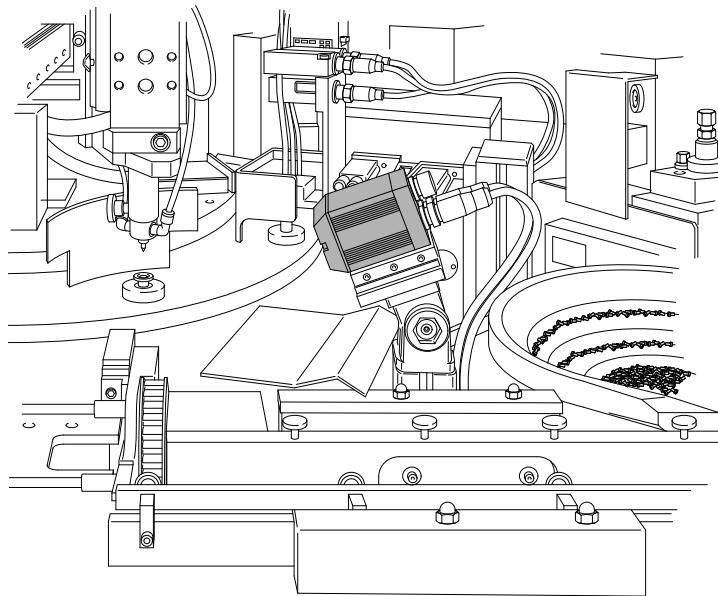
- Degree of protection IP67
- Fork widths: 30, 50, 80 and 120 mm
- Numerous mounting types
- Good visibility thanks to

- red light
- Adjustment by means of Teach-In (SOOF-P) or potentiometer (SOOF-M)
- Accurate, with high resolution and repetition accuracy



Compact vision systems

Sheer economy: the innovative and intelligent camera systems. Thanks to the compact, industrial design and clear interface definition, these versatile vision systems can also be easily integrated into existing installations.



For type, position and rotational position detection: the intelligent compact camera system SBO...Q



Camera system SBOC-M/SBOI-M

Designed to support diagnostics and commissioning as well as function monitoring during fast motion sequences. The innovative and low-cost alternative to conventional high-speed cameras.

- Integrated electronics to record and save motion sequences
- Several cameras can be networked via Ethernet and temporarily synchronisable
- Lens mounting: integrated lens or C-mount
- Working distance: 22 ... 1000 mm or depending

- on the selected lens
- Field of vision: 14 x 10 to 520 x 390 mm or depending on the selected lens
- Sensor resolution: 640 x 480 pixels
- Frame rate: 185 ... 2000 fps
- Protection class: IP65/IP67



Camera system SBOC-Q/SBOI-Q

Intelligent vision system for precision positioning of axes, type identification, position detection and 2D quality inspection of moving parts and parts at rest. Plus: OCR and reading 1/2-D code

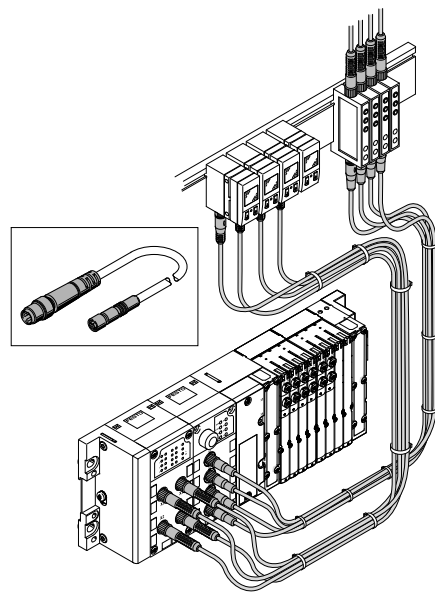
- Sensor resolutions: 640 x 480, 752 x 480 or 1280 x 1024 pixels (monochrome and colour)
- Standardised software interface using Ethernet, as well as 24 V I/O
- Protection class: IP65/IP67

- Integrated PLC run-time system (CoDeSys 2.3)
- CANopen master functionality in connection with CoDeSys
- Lens mounting: integrated lens or C-mount
- Compact dimensions, low weight



Connection technology

The sensor portfolio from Festo fits and functions smoothly. It is optimally harmonised with the modular cable system NEBU which connects sensors and downstream evaluation units. Connection problems are a thing of the past.



Connect quickly and easily over ranges of up to 30 m with the modular cable system NEBU



Combination options: modular cable system NEBU

The fast way to the optimal sensor cable is via this modular system for connecting cables, offering unlimited combination options such as sockets, plug

connectors, different cable lengths and qualities, all low cost, reliable and flexible. Harmonised with all devices using M5, M8 and M12 plugs, such as proximity sensors, position transmitters, pressure

switches, pressure transmitters, flow sensors, optical and inductive sensors. There is a free choice of cable lengths between 0.1 and 30 m.



Remote control: Signal converter SVE4

The signal converter SVE4 converts the analogue output signal from a sensor into switching points that can be taught in directly on the signal converter.

They are ideal wherever the accessibility of sensors is limited.

- Two switching outputs, which can be configured independently of one another as threshold value, hysteresis or window

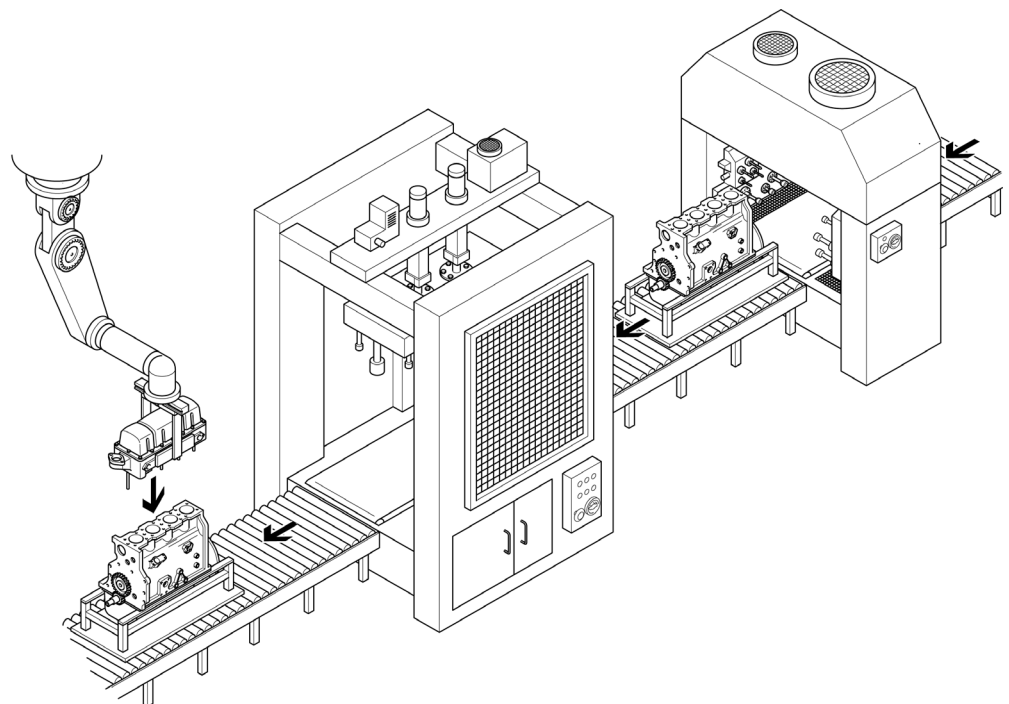
comparators as required

- Quick installation without interrupting the operation of the system
- Simple commissioning thanks to the integrated Teach-In function



Industry-specific sensors

All kinds of industries rely on the first-rate products and services offered by Festo and thus enjoy a mutually beneficial partnership. This also includes application-optimised products for even greater productivity and enhanced process reliability – with everything for process automation and the automotive industry from a single source.



Automotive industry and machine tool industry

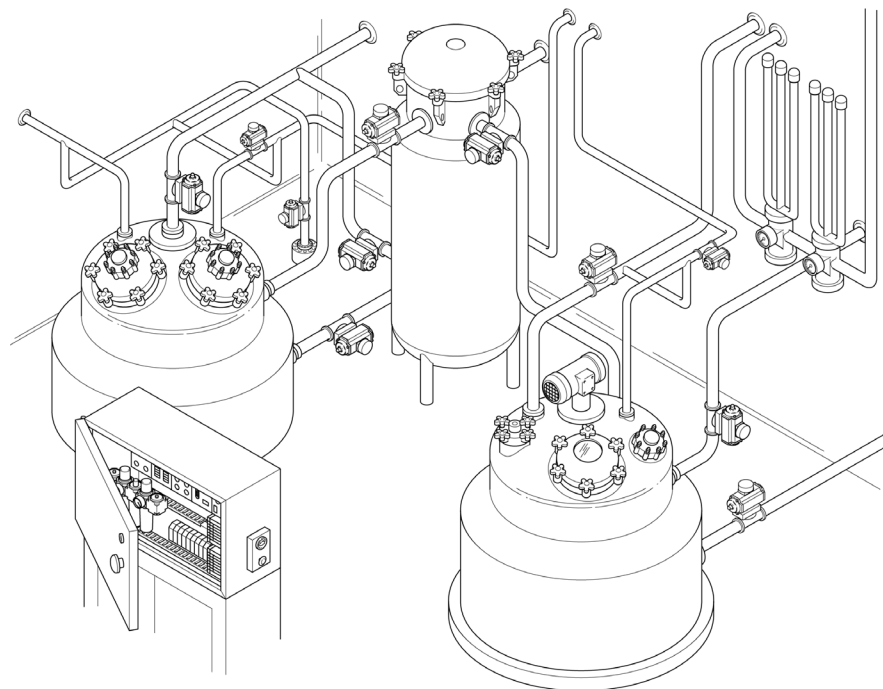


Precise and reliable: Air gap sensors SOPA

The reliable, attractively priced compact solution for workpiece contact monitoring with micron precision when machining engine parts. It comes fully equipped with a controller

module, compressed air regulator, measuring air shut-off valve, air jet function and up to 4 measuring modules. An additional advantage: up to 4 air gap sensors can be configured on a modular basis and pneumatically linked.

- Measuring range: 20-200 μm
- Operating pressure: 4 ... 7 bar
- Repeatable switching value: $\pm 5 \mu\text{m}$
- Freely programmable switching function
- Protection class IP65



Automation process



Systematically safe:

Sensor boxes DAPZ, QH-DR-E

Systematic safety in the process industry: reliable, overload-proof and durable end-position detection in valve control systems – even in areas with potentially

explosive atmospheres

- Inductive, pneumatic or electrical (microswitch)
- Large visual display, visible from all sides
- Simple mounting options on semi-rotary valve actuators

(Namur interface)

- AS-interface variant available
- Can also be used with 3-way ball valves
- Highly flexible: choice of mounting bridges, various voltage ratings, explosion-proof variants

New generation: sensor boxes SRBP/SRAP

From sensing the mid-position to the analogue feedback signal in 4 ... 20 mA of the valve position, the new sensor boxes offer completely innovative possibilities.

- Reliable Reed (SRBP) and Hall (SRAP) technologies
- Visual position indication in 3D for valve position and flow direction
- Direct mounting on DFPB without adapter bridges

- Adjustable working range 0° ... 270°
- Protection class IP65 and CRC 3
- Explosion-proof for zone II 3 GD
- Optionally with integrated valve port

Festo worldwide

Argentina

Festo S.A.
Edison 2392
(1640) Martínez
Prov. Buenos Aires
Tel. +54 (011) 4717 82 00,
Fax +54 (011) 47 17 82 82
E-mail: info@ar.festo.com

Australia

Festo Pty. Ltd.
Head Office (Melbourne)
179-187 Browns Road
P.O. Box 261
Noble Park Vic. 3174
Call Toll Free 1300 88 96 96
Fax Toll Free 1300 88 95 95
Tel. +61(0)3 97 95 95 55,
Fax +61(0)3 97 95 97 87
E-mail: info_au@festo.com

Austria

Festo Gesellschaft m.b.H.
Linzer Straße 227
1140 Wien
Tel. +43 (0)1 910 75-0, Fax +43 (0)1 910 75-250
E-mail: automation@festo.at

Belarus

IP Festo
Masherov avenue, 78
220035 Minsk
Tel. +375 (0)17 204 85 58,
Fax +375 (0)17 204 85 59
E-mail: info_by@festo.com

Belgium

Festo Belgium sa
Rue Colonel Bourg 101
1030 Bruxelles
Tel. +32 (0)2 702 32 11, Fax +32 (0)2 702 32 09
E-mail: info_be@festo.com

Belgium

Festo Belgium nv
Kolonel Bourgstraat 101
1030 Brussel
Tel. +32 (0)2 702 32 11, Fax +32 (0)2 702 32 09
E-mail: info_be@festo.com

Brazil

Festo Brasil Ltda
Rua Guiseppa Crespi, 76
KM 12,5 - Via Anchieta
04183-080 São Paulo SP-Brazil
Tel. +55 (0)11 50 13 16 00,
Fax +55 (0)11 50 13 18 68
E-mail: info_br@festo.com

Bulgaria

Festo EOOD
1592 Sofia
Bul. Christophor Kolumb 9
Tel. +359 (0)2 960 07 12,
Fax +359 (0)2 960 07 13
E-mail: info_bg@festo.com

Canada

Festo Inc.
5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Tel. +1 (0)905 624 90 00,
Fax +1 (0)905 624 90 01
E-mail: info_ca@festo.com

Chile

Festo S.A.
Avenida Américo Vespucio, 760
Pudahuel
Santiago
Tel. +56 2 690 28 00, Fax +56 2 690 28 60
E-mail: info.chile@cl.festo.com

China

Festo (China) Ltd.
1156 Yunqiao Road,
Jinqiao Export Processing Zone,
Pudong,
201206 Shanghai
Tel. +86 21 60 81 51 00, Fax +86 21 58 54 03 00
E-mail: info_cn@cn.festo.com

Colombia

Festo Ltda.
Autopista Bogotá - Medellín Km 6 (costado sur)
Tenjo, Cundinamarca
Tel. +57 (1) 865 77 88,
Fax +57 (1) 865 77 88 Ext.287
E-mail: mercadeo@co.festo.com

Croatia

Festo d.o.o.
Nova Cesta 181
10000 Zagreb
Tel. +385 (0)1 619 19 69,
Fax +385 (0)1 619 18 18
E-mail: info_hr@festo.com

Czech Republic

Festo, s.r.o.
Modřanská 543/76
147 00 Praha 4
Tel. +420 261 09 96 11, Fax +420 241 77 33 84
E-mail: info_cz@festo.com

Denmark

Festo A/S
Islevdalvej 180
2610 Rødovre
Tel. +45 70 21 10 90, Fax +45 44 88 81 20
E-mail: info_dk@festo.com

Estonia

Festo OY AB Eesti Filiaal
Laki 11B
12915 Tallinn
Tel. +372 666 15 60, Fax +372 666 15 61
E-mail: info_ee@festo.com

Finland

Festo OY
Mäkituvantie 9
P.O. Box 86
01511 Vantaa
Tel. +358 (09) 87 06 51,
Fax +358 (09) 87 06 52 00
E-mail: info_fi@festo.com

France

Festo Eurl
ZA des Maisons Rouges
8 rue du clos sainte Catherine
94360 Bry-sur-Marne
Tel. +33 (0) 820 20 46 40 (numéro indigo),
Fax +33 (0) 820 20 46 41
E-mail: info_fr@festo.com

Germany

Festo AG & Co. KG
Postfach
73726 Esslingen
Ruiter Straße 82
73734 Esslingen
Tel. +49 (0)711 347 0, Fax +49 (0)711 347 26 28
E-mail: info_de@festo.com

Greece

Festo Ltd.
40 Hamosternas Ave.
P.C. 11853 Athens
Tel. +30 210 341 29 00, Fax +30 210 341 29 05
E-mail: info_gr@festo.com

Hong Kong

Festo Ltd.
6/F New Timely Factory Building,
497 Castle Peak Road,
Kowloon, Hong Kong
Tel. +852 27 43 83 79, Fax +852 27 86 21 73
E-mail: info_hk@festo.com

Hungary

Festo Kft.
Csillaghegyi út 32-34.
1037 Budapest
Hotline +36 1 436 51 00
Tel. +36 1 436 51 11, Fax +36 1 436 51 01
E-mail: info_hu@festo.com

India

Festo Controls Private Ltd.
237B,
Bommasandra Industrial Area,
Bangalore Hosur Highway,
Bangalore 560 099
Tel. +91 (0)80 22 89 41 00,
Fax +91 (0)80 27 83 20 58 / 27 83 33 62
E-mail: info_in@festo.com

Indonesia

PT. Festo
Jl. Sultan Iskandar Muda No. 68
Arteri Pondok Indah
Jakarta 12240
Tel. +62 (0)21 27 50 79 00,
Fax +62 (0)21 27 50 79 98
E-mail: info_id@festo.com

Iran

Festo Pneumatic S.K.
2, 6th street, 16th avenue,
Km 8, Special Karaj Road
P.O.Box 15815-1485
Teheran 1389793761
Tel. +98 (0)21 44 52 24 09,
Fax +98 (0)21 44 52 24 08
E-mail: Mailroom@festo.ir

Ireland

Festo Limited
Unit 5 Sandyford Park
Sandyford Industrial Estate
Dublin 18
Tel. +353 (0)1 295 49 55,
Fax +353 (0)1 295 56 80
E-mail: info_ie@festo.com

Israel

Festo Pneumatic Israel Ltd.
P.O. Box 1076
Ha'atzma'ut Road 48
Yehud 56100
Tel. +972 (0)3 632 22 66,
Fax +972 (0)3 632 22 77
E-mail: info_il@festo.com

Italy

Festo SpA
Via Enrico Fermi 36/38
20090 Assago (MI)
Tel. +39 02 45 78 81, Fax +39 02 488 06 20
E-mail: info_it@festo.com

Japan

Festo K.K.
1-26-10 Hayabuchi
Tsuzuki-ku
Yokohama 224-0025
Tel. +81 (0)45 593 56 10 / -5611,
Fax +81 (0)45 593 56 78
E-mail: info_jp@festo.com

Korea South

Festo Korea Co., Ltd.
470-1 Gasan-dong
Geumcheon-gu
Seoul #153-803
Tel. +82 (0)2 850 71 14, Fax +82 (0)2 864 70 40
E-mail: info_kr@festo.com

Latvia

Festo SIA
A. Deglava iela 60
1035 Riga
Tel. +371 67 57 78 64, Fax +371 67 57 79 46
E-mail: info_lv@festo.com

Lithuania

Festo UAB
Partizanu 63M
50306 Kaunas
Lietuva
Tel. +370 (8)7 32 13 14, Fax +370 (8)7 32 13 15
E-mail: info_lt@festo.com

Malaysia

Festo Sdn. Berhad
10 Persiaran Industri
Bandar Sri Damansara
Wilayah Persekutuan
52200 Kuala Lumpur
Tel. +60 (0)3 62 86 80 00,
Fax +60 (0)3 62 75 64 11
E-mail: info_my@festo.com

Mexico

Festo Pneumatic, S.A.
Av. Ceylán 3,
Col. Tequesquinahuac
54020 Tlalnepantla
Estado de México
Tel. +52 (01)55 53 21 66 00,
Fax +52 (01)55 53 21 66 55
E-mail: festo.mexico@mx.festo.com

Netherlands

Festo B.V.
Schieweg 62
2627 AN Delft
Tel. +31 (0)15 251 88 99,
Fax +31 (0)15 251 88 67
E-mail: info@festo.nl

New Zealand

Festo Ltd.
20 Fisher Crescent
Mount Wellington
Auckland
Tel. +64 (0)9 574 10 94, Fax +64 (0)9 574 10 99
E-mail: info_nz@festo.com

Nigeria

Festo Automation Ltd.
Motorways Centre, First Floor, Block C
Alausa, Ikeja,
Lagos
Tel. +234 (0)1 794 78 20,
Fax +234 (0)1 555 78 94
E-mail: info@ng.festo.com

Norway

Festo AS
Ole Deviks vei 2
0666 Oslo
Tel. +47 22 72 89 50, Fax +47 22 72 89 51
E-mail: info_no@festo.com

Peru

Festo S.R.L.
Amador Merino Reyna 480
San Isidro
Lima
Tel. +51 (1) 219 69 60, Fax +51 (1) 219 69 71
E-mail: festo.peru@pe.festo.com

Philippines

Festo Inc.
Festo Building
KM 18, West Service Road
South Superhighway
1700 Paranaque City
Metro Manila
Tel. +63 (0)2 776 68 88, Fax +63 (0)2 823 42 19
E-mail: info_ph@festo.com

Poland

Festo Sp. z o.o.
Janki k/Warszawy
ul. Mszczonowska 7
05090 Raszyn
Tel. +48 (0)22 711 41 00,
Fax +48 (0)22 711 41 02
E-mail: info_pl@festo.com

Portugal

Festo Portugal
MT-AUT, Automação Industrial Unipessoal, LDA.
Rua Manuel Pinto De Azevedo, 567
Apartado 8013
4109-016 Porto
Contact Center: 707 20 20 43
Tel. +351 22 615 51 50, Fax +351 22 615 61 89
E-mail: info@pt.festo.com

Romania

Festo S.R.L.
St. Constantin 17
010217 Bucuresti
Tel. +40 (0)21 310 29 83,
Fax +40 (0)21 310 24 09
E-mail: info_ro@festo.com

Russia

OOO Festo-RF
Michurinskiy prosp., 49
119607 Moscow
Tel. +7 495 737 34 00, Fax +7 495 737 34 01
E-mail: info_ru@festo.com

Singapore

Festo Pte. Ltd.
6 Kian Teck Way
Singapore 628754
Tel. +65 62 64 01 52, Fax +65 62 61 10 26
E-mail: info@sg.festo.com

Slovakia

Festo spol. s r.o.
Gavlovičová ul. 1
83103 Bratislava 3
Tel. +421 (0)2 49 10 49 10,
Fax +421 (0)2 49 10 49 11
E-mail: info_sk@festo.com

Slovenia

Festo d.o.o. Ljubljana
IC Trzin, Blatnica 8
1236 Trzin
Tel. +386 (0)1 530 21 00,
Fax +386 (0)1 530 21 25
E-mail: info_si@festo.com

South Africa

Festo (Pty) Ltd.
22-26 Electron Avenue
P.O. Box 255
Isando 1600
Tel. +27 (0)11 971 55 00,
Fax +27 (0)11 974 21 57
E-mail: info_za@festo.com

Spain

Festo Pneumatic, S.A.U.
Avenida Granvia, 159
Distrito Económico Granvia L'H
08908 Hospitalet de Llobregat
Barcelona
Tel.: 901243660, Fax: 902243660
Tel. +34 93 261 64 00, Fax +34 93 261 64 20
E-mail: info_es@festo.com

Sweden

Festo AB
Stilmansgatan 1
Box 21038
200 21 Malmö
Tel. +46 (0)20 38 38 40, Fax +46 (0)40 38 38 10
E-mail: order@festo.se

Switzerland

Festo AG
Moosmattstrasse 24
8953 Dietikon ZH
Tel. +41 (0)44 744 55 44,
Fax +41 (0)44 744 55 00
E-mail: info_ch@festo.com

Taiwan

Festo Co., Ltd.
Head Office
24450
9, Kung 8th Road
Linkou 2nd Industrial Zone
Linkou Dist., New Taipei City
Taiwan, R.O.C.
Tel. +886 (0)2 26 01-92 81,
Fax +886 (0)2 26 01 92 86-7
E-mail: festotw@tw.festo.com

Thailand

Festo Ltd.
67/1 Phaholyothin Rd.,
T. Klong 1, A. Klongluang
Pathumthani 12120
Tel. +66 29 01 88 00, Fax +66 29 01 88 30
E-mail: info_th@festo.com

Turkey

Festo San. ve Tic. A.S.
Tuzla Mermerciler Organize
Sanayi Bölgesi 6/18
34956 Tuzla - Istanbul/TR
Tel. +90 (0)216 585 00 85,
Fax +90 (0)216 585 00 50
E-mail: info_tr@festo.com

Ukraine

Festo Ukraina
DP Festo
vul. Borisoglebskaya,11
04070, Kiev
Tel. +380 (0)44 239 24 30,
Fax +380 (0)44 463 70 96
E-mail: orders_ua@festo.com

United Kingdom

Festo Limited
Applied Automation Centre
Caswell Road
Brackmills Trading Estate
Northampton NN4 7PY
Tel. +44 (0)1604 / 66 70 00,
Fax +44 (0)1604 / 66 70 01
E-mail: info_gb@festo.com

United States
Festo Corporation (New York)
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788
Call Toll-free 800/993 3786
Fax Toll-free 800/963 3786
Tel. +1(631) 435 08 00, Fax +1(631) 435 80 26
E-mail: customer.service@us.festo.com

Venezuela

Festo C.A.
Av. 23 esquina con calle 71
Nº 22-62, Edif. Festo.
Sector Paraíso
Maracaibo - Venezuela
Tel. +58 (261) 759 11 20/759 41 20/759 44 38,
Fax +58 (261) 759 04 55
E-mail: festo@festo.com.ve

Vietnam

Festo Co., Ltd (Cong Ty TNHH Festo)
No. 206 Tran Nao Street
Ward Binh An
District 2
Ho Chi Minh City
Tel. +84 (0)8 740 69 09, Fax +84 (0)8 740 69 10
E-mail: info_vn@festo.com